

— ATHANASSIOS KALIUDIS

ntishock

This ingenious laser welds glass without any additional material

Femtosecond laser pulses weld glass without any additional material. The process is economical and ready for industrial practice.


Economical, high-quality laser-welding for glass? That posed a major challenge – until now! TRUMPF has developed a femtosecond laser system that replaces conventional joining processes such as glueing. The advantage: in contrast to glueing processes, no additional materials that are susceptible to evaporation or embrittlement are required. This reduces costs and increases durability as well as the stability of the seam.

The special nature of glass poses considerable challenges with regard to processing: glass is hard and brittle, has lower thermal conductivity than metal and tends to crack when heated unevenly due to the internal tension developed. Femtosecond laser systems can prevent such cracking. "The laser system must permit variable programming of pauses and pulses," explains Elke Kaiser, applications engineer at TRUMPF.

— Variable pulses

Glass is permeable to light with wavelengths ranging from ultraviolet to near infrared. Absorption takes place only when the energy densities are very high, so that processing within the glass is facilitated. The highest performance density lies deep in the lower glass at the focal point. The energy from several thousand laser beam pulses causes a melt pool to be created and pushed upwards in just a few milliseconds. Skillful thermal management and an optimal ratio of pulses and pauses prevent the glass from cracking.



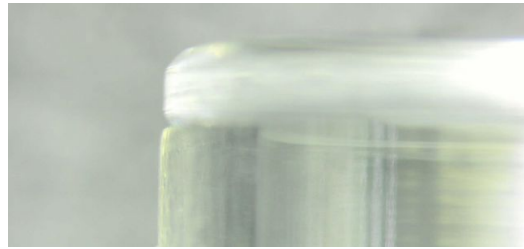

Lateral view: Laser-welded protective caps are more than twice as strong as conventionally joined caps in breakage tests.

Glass components that were previously glued to each other can now be economically welded with high-quality results, as TRUMPF has demonstrated in its own production of laser light cables. Until recently, the lids of the protective caps for the laser light cables were glued on. Now, lasers are used to weld them on. The joint strength of the glass parts depends primarily on the level of pulse energy. The pulse energy for 1030 nanometer infrared light needs to be 9 microjoule.

— More to come



TRUMPF

TRUMPF

